falch® world of water jetting

scater range

	scater 5 260 v formwork	scater 5 260 v	scater 5 260 vp	scater 5 380 vp	scater 30 380 v	scater 30 380 v paint shop
	max. 500 bar (max. 7300 psi)	max. 500 bar (max. 7300 psi)	max. 500 bar (max. 7300 psi)	max. 500 bar (max. 7300 psi)	max. 3000 bar (max. 43500 psi)	max. 3000 bar (max. 43500 psi)
	10 – 30 l/min (2,6 – 7,8 US gal/min)	10 – 30 l/min (2,6 – 7,8 US gal/min)	15 – 30 l/min (3,9 – 7,8 US gal/min)	20 – 60 l/min (5,2 – 15,8 US gal/min)	20 - 45 l/min (5,2 – 11,9 US gal/min)	20 - 45 l/min (5,2 – 11,9 US gal/min)
	98 °C	98 °C	98 °C	98 °C	70 °C	70 °C
	nozzle beam 12/6, style 9	nozzle beam 6/3, style 13	nozzle beam 6/3, style 13	nozzle beam 6/3, style 13	nozzle cross as 20/10, style 9	nozzle cross 16/4, style 9, +/- 10°
	self-drive	self-drive	self-drive	self-drive	self-drive	a-drive
	brush seal	brush seal	brush seal	brush seal (mega seal)	brush seal	(brush seal)
	M22 × 1,5 outer thread	M22 × 1,5 outer thread	M22 × 1,5 outer thread	M22 × 1,5 outer thread	M26 × 1,5 outer thread	M26 × 1,5 outer thread
	24 months	24 months	24 months	24 months	24 months	24 months
	24 kg	28 kg	28 kg	54 kg	71 kg	70 kg
	833 × 336 ×1100 mm	980 × 368 ×1100 mm	980 × 368 ×1100 mm	1095 × 487 × 1223 mm	1058 × 487 × 1223 mm	1058 × 476 × 1223 mm
rent	–	–	✓	✓	✓	✓
falch n°	z0001725	z0001751	z0001746	z0000969	z0001747	z0000866

standard accessories

scater 5 v / 30 v + paint shop

scater 5 vp

recommend

scater 5 380 vp

z0000983

optional accessories

e1000136

e1210196

e0500338

e1210132

z0000993

falch® world of water jetting

line worker 250

	line worker 250
	max. 3000 bar (max. 43500 psi)
	45 l/min (max. 3000 bar) 85 l/min (max. 1500 bar)
N	max. 970 N (97 kg)
	e-drive wheels, rpm controlled e-drive nozzles, rpm controlled
	230 V / 50 Hz, 16 A
IP	55
	24/1 h/d
	24 months
	120 kg
	1510 × 577 × 1110 mm
rent	✓
falch n°	z0000683 (standard version)

services

falch gmbh
headquarter
street of water jetting 1
89143 blaubeuren-seissen (germany)
+49 7344 9244-0
+49 7344 9244-4090
info@falch.com
www.falch.com

w040036823.05.2022

falch® world of water jetting

scater range

www.falch.com

falch® world of water jetting

examples





vacu press system (vp)

line worker 250 with waste water suction (vp)



scater range

falch
world of water jetting

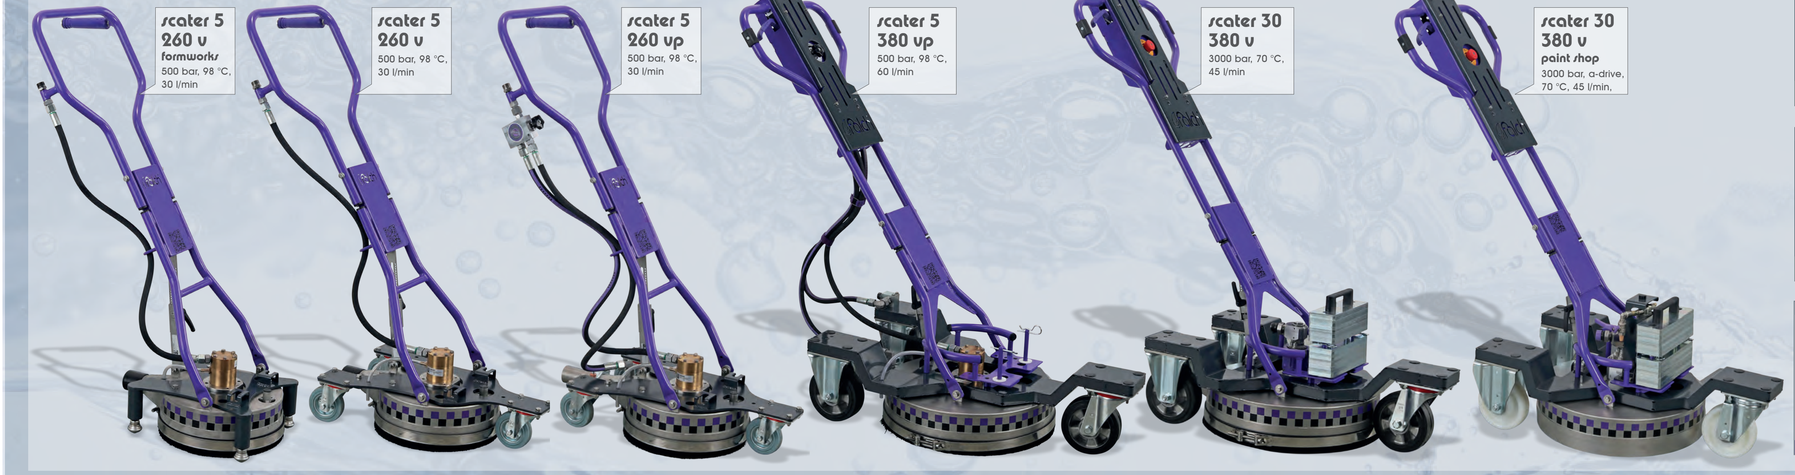

scater 5 260 v
formworks
500 bar, 98 °C,
30 l/min

scater 5 260 v
500 bar, 98 °C,
30 l/min

scater 5 260 vp
500 bar, 98 °C,
30 l/min

scater 5 380 vp
500 bar, 98 °C,
60 l/min

scater 30 380 v
3000 bar, 70 °C,
45 l/min

scater 30 380 v
paint shop
3000 bar, a-drive,
70 °C, 45 l/min,

rubber seal

e1000071 260
e1000126 380

brush seal

e1000151 260
e1000150 380

mega seal

e0600337 380

line worker 250

line worker 250 380 e vc
3000 bar, 70 °C
e-drive wheels



z0000910 line pointer

sliding rollers for formworks

height adjustment

large rotating wheels

vp with waste water hose

additional weights

waste water system / opt. mega seal

emergency button

paint shop version

adjustable a-drive

easy transport by car

nozzle check

e-drive for wheels

vacu-press system

*pictured products are subject to change, nonliability for picture true delivery.